

DUMPSBOSS.

Avaya Pod Fx Integration Exam

Avaya 7593X

Version Demo

Total Demo Questions: 10

Total Premium Questions: 68

Buy Premium PDF

<https://dumpsboss.co>

support@dumpsboss.co

support@dumpsboss.co
dumpsboss.co

QUESTION NO: 1

Which three are components of the Pod Orchestration Suite (POS)? (Choose three.)

- A. IP Flow Manager
- B. Avaya Diagnostic Server
- C. Pod Visualization Performance and Fault Manager
- D. Element Management System

ANSWER: A C D

QUESTION NO: 2



Refer to the exhibit.

Which Avaya Session Border Controller for Enterprise (ASBCE) configuration option is shown?

- A. Hybrid
- B. Geographic Redundancy
- C. High Availability
- D. Two-wire

ANSWER: C

QUESTION NO: 3

Under certain circumstances, the integration process between SMGR and POS applications must be performed in the field to create the launch links to POS applications.

Which two circumstances would cause this situation to occur? (Choose two.)

- A. when a new service pack installation is taking place outside the supported software line up
- B. when a POS application is being deployed due to product malfunction

- C. when a new Avaya Aura® application is being added to the Pod
- D. when a new ESXi host is being added to Pod Visualization Manager (PVM)

ANSWER: B D

QUESTION NO: 4

Which two are optional components for Pod Fx? (Choose two.)

- A. Pod Orchestration Suite
- B. VSP Network Switches
- C. Avaya Session Border Controller for Enterprise
- D. G450 Media Gateway

ANSWER: C D

QUESTION NO: 5

The screenshot shows the 'Virtual Machine Inventory' section of the VPS interface. It includes a table with columns for VM Name, Hostname / IP Address, Application Type, and Monitor Events. Below this, a 'Connectivity Detail' table shows network adapters mapped to PG Name, PG VLA, VSwitch Name, Uplink Name, Device Name, and Device IP.

VM Name	Hostname / IP Address	Application Type	Monitor Events
AVAYA COM-VPS POS Bir Team...	10.140.239.74		1
AVAYA PFM POS Bir Team1-Infra	10.140.239.244		29

Name	PG Name	PG VLA...	VSwitch Nam...	Uplink Name	Device Name	Device IP
Network adapter 1	MGMT-239	1010	vSwitch0	vmnic5		
Network adapter 1	MGMT-239	1010	vSwitch0	vmnic4		

AVAYA PVM POS Bir Team1-Infra	10.140.239.70					3
AVAYA PVM-EXT POS Bir Team...	10.140.239.74					3
AVAYA SMGR 7.0 POS Bir Team...	10.140.239.72					0

Refer to the exhibit.

Which statement about Network adapter 1 is true?

- A. Its physical layer redundancy is provided by vmnic4 and vmnic5.
- B. It is not mapped to Priority Group MGMT-239.

- C. It is a Tagged port with 802.1Q VLAN tag of 1010.
- D. It is listed twice because there is a Primary and a Secondary instance of the adapter.

ANSWER: A

QUESTION NO: 6


A new ESXi host has been added to the Pod. However, unlike existing ESXi hosts within the Pod, the new host cannot be monitored or detected by Visualization Performance and Fault Manager (VPFM).

What is causing this problem?

- A. The new host has not been added to Virtualization Provisioning Service.
- B. The new host has not been added to Pod Visualization Manager.
- C. The new host has not been added to Device and Server Credentials Editor.
- D. The new host has not been Licensed yet.

ANSWER: C

QUESTION NO: 7

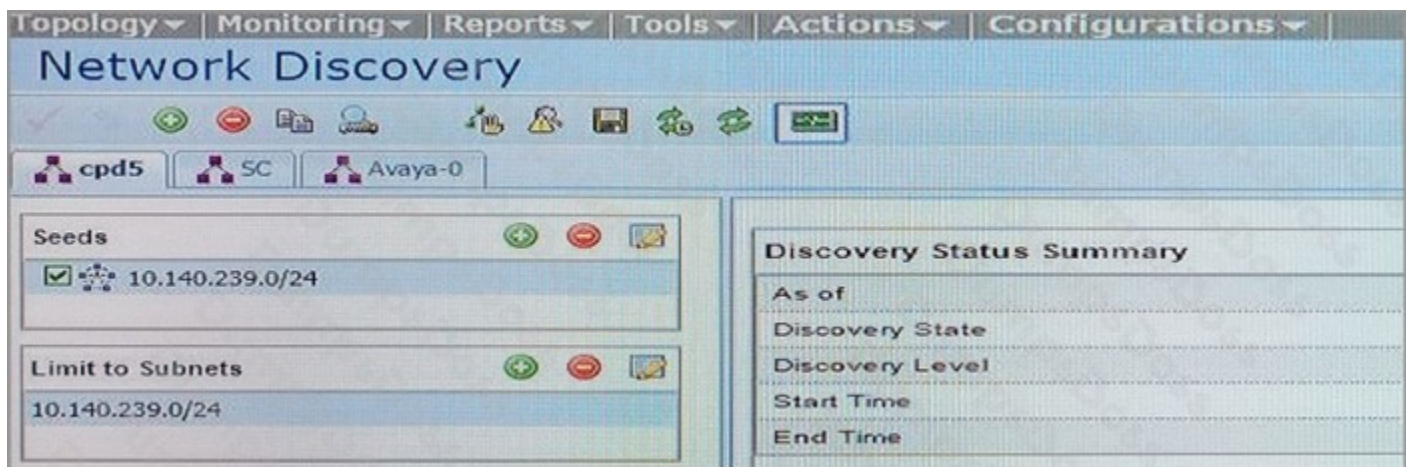

Refer to the exhibit.

When the monitoring option is selected as shown in the exhibit, which two events occur? (Choose two.)

- A. VPFM uses collected data to represent it in the form of trend charts and dashboards.
- B. VPFM starts to poll devices for data.
- C. VPFM will forward any traps received from devices to the SAL Gateway.
- D. VPFM will monitor changes to the configuration of devices.

ANSWER: C D

QUESTION NO: 8

Pod Dashboard			
	CPU(%)	Mem(%)	Temp(°C)
Type : Gateway (2 Devices)			
↑	0%	51%	19.5°C
		10.140.237.74	
↑	0%	51%	20.5°C
		10.140.237.73	
Type : Server (5 Devices)			
↑	0%	3%	18°C
		10.140.237.71	
↑	9%	5%	16.5°C
		10.140.237.70	
↑	2%	16%	14°C
		10.140.237.68	
↑	2%	8%	13.5°C
		10.140.237.67	
↑	0%	2%	13°C
		10.140.237.66	
Type : Storage (1 Device)			

Refer to the exhibit.

How can an administrator change the Pod Visualization Manager (PVM) threshold values of the CPU, Memory, and Temperature measurements?

- A. by modifying the SNMP threshold values in VPFM-Inventory
- B. by modifying the values in PVM - Administrative functions – Preferences.
- C. by modifying the values in PVM – Administrative functions – Profile.
- D. The default threshold values cannot be changed.

ANSWER: A

QUESTION NO: 9

Which two statements regarding the EMC VNXe3200 storage array used in Pod Fx 3.0 are true? (Choose two.)

- A. Pod Fx 4200 uses the array with 1 DPE and up to 5 DAEs.
- B. Pod Fx 2400 uses the array with 1 DPE and up to 3 DAEs.
- C. Pod Fx 4200 uses the array with 2 DPE and up to 5 DAEs.
- D. Pod Fx 2400 uses the array with 1 DPE and up to 2 DAEs.

ANSWER: A D

QUESTION NO: 10

When powering up the virtual machines, what is the first virtual machine that needs to be powered on?

- A. vCenter Server
- B. Communication Manager
- C. System manager
- D. WebLm

ANSWER: D