

# DUMPSBOSS.

## Service Provider Routing and Switching - Specialist (JNCIS-SP)

Juniper JN0-362

Version Demo

Total Demo Questions: 10

Total Premium Questions: 64

Buy Premium PDF

<https://dumpsboss.co>

[support@dumpsboss.co](mailto:support@dumpsboss.co)

support@dumpsboss.co  
dumpsboss.co

## QUESTION NO: 1

Which statement about a virtual-router type of routing instance is correct?

- A. It is used to separate large networks into smaller administrative entities
- B. It is the only routing instance type supported on Junos devices
- C. It is used in Layer 3 VPN implementations
- D. It is used to create and maintain separate routing and forwarding tables

**ANSWER: D**

## QUESTION NO: 2

Which two statements are true about IP and GRE tunnels? (Choose two.)

- A. The protocol field is changed in the inner IP packet header
- B. Tunnel traffic is encrypted
- C. The TTL field is changed in the inner IP packet header
- D. Tunnel endpoints need a valid route to the remote endpoint

**ANSWER: C D**

## QUESTION NO: 3

Which two characteristics describe IS-IS? (Choose two.)

- A. A collection of Level 1 routers serves as the IS-IS backbone
- B. Level 2 routers connect areas in an IS-IS autonomous system
- C. A collection of Level 2 routers serve as the IS-IS backbone
- D. A Level 1 IS routes between areas and toward other autonomous systems

**ANSWER: B C**

**Explanation:**

Reference: [https://www.juniper.net/documentation/en\\_US/junos/topics/concept/isis-levels-understanding.html](https://www.juniper.net/documentation/en_US/junos/topics/concept/isis-levels-understanding.html)

## QUESTION NO: 4

Click the Exhibit button.

```
[edit protocols]
user@router# show ospf
area 0.0.0.0
  interface ge-0/0/1.0
    bfd-liveness-detection {
      minimum-interval 300;
      multiplier 4;
      session-mode automatic;
    }
  }
}
```

Referring to the exhibit, how many milliseconds must pass before the interface ge-0/0/1.0 is considered down?

- A. 1200 ms
- B. 900 ms
- C. 1600 ms
- D. 2400 ms

**ANSWER: A**

## QUESTION NO: 5

You have two MX Series devices connected together and configured for Layer 2 operations. The interface that connects the two routers must carry tagged and untagged traffic.

Which approach would meet this objective?

- A. Configure the interfaces as access ports with the native VLAN option
- B. Configure the interfaces as trunk ports with the native VLAN option
- C. Configure the interfaces as access ports with the voice VLAN option

D. Configure the interfaces as trunk ports with the voice VLAN option

**ANSWER: B**

## QUESTION NO: 6

Click the Exhibit button.

```
[edit protocols]
  'bgp'
Error in neighbor 192.168.1.2 of group my-int-group:
peer AS number must be configured for an external peer
error: configuration check-out failed
```

You are configuring an IBGP group. When you commit your configuration, you receive the error shown in the exhibit.

Which additional configuration parameter must you add to your configuration?

- A. multipath
- B. type external
- C. type internal
- D. export

**ANSWER: C**

## QUESTION NO: 7

Which two statements are true for GRE tunneling? (Choose two.)

- A. GRE tunnel endpoints must have a valid route to the remote endpoint
- B. GRE tunnels support multiple logical units per interface
- C. GRE tunnels are stateful by default
- D. GRE tunnels support only one logical unit per interface

**ANSWER: A B**

**Explanation:**

Reference: [https://www.juniper.net/documentation/en\\_US/junos/topics/topic-map/filtering-unicast-packets-multicast-tunnel-interfaces.html#id-configuring-unicast-tunnels](https://www.juniper.net/documentation/en_US/junos/topics/topic-map/filtering-unicast-packets-multicast-tunnel-interfaces.html#id-configuring-unicast-tunnels)

## QUESTION NO: 8

Click the Exhibit button.

```
[edit protocols]
user@router# show
protocols {
  oam {
    gre-tunnel {
      interface gr-1/1/10.1 {
        keepalive-time 10;
        hold-time 30;
      }
    }
  }
}
```


Referring to the exhibit what are two reasons for the configuration stanza? (Choose two.)

- A. to reduce the risk of forwarding traffic through a stateless tunnel
- B. to mark the tunnel down after the hold-time expires
- C. to remove the tunnel interface from inet.0 after the hold-time expires
- D. to mark the tunnel up after the hold-time expires

**ANSWER: A B**

## QUESTION NO: 9

Click the Exhibit button.

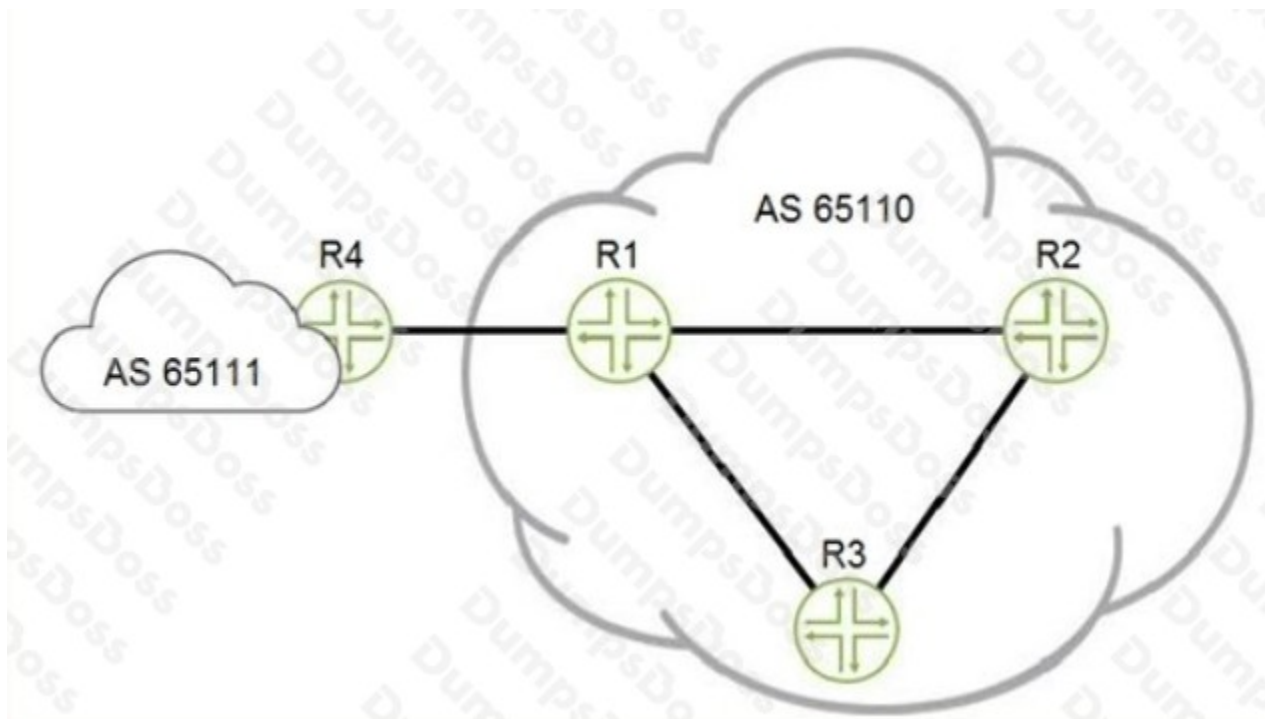

Referring to the exhibit, which two statements are true? (Choose two.)

- A. The BGP peering between R1 and R4 should use loopback interface addresses
- B. The BGP peering between R1 and R4 should use physical interface addresses
- C. The BGP peerings between R1, R2, and R3 should use loopback interface addresses
- D. The BGP peerings between R1, R2, and R3 should use physical interface addresses

**ANSWER: B C**

**QUESTION NO: 10**

Click the Exhibit button.

```
[edit protocols ospf]
user@router# show
reference-bandwidth 10g;
area 0.0.0.0 {
    interface ge-1/0/0.0 {
        priority 255;
    }
    interface ge-3/0/0.0 {
        priority 128;
    }
    interface xe-0/0/0.0 {
        interface-type nbma;
    }
}
```

Referring to the exhibit, which statement is correct?

- A. Interface xe-0/0/0.0 has a default metric of 10
- B. Interface ge-3/0/0.0 has a default metric of 10
- C. Interface ge-1/0/0.0 can only form a single adjacency
- D. Interface xe-0/0/0.0 can only form a single adjacency

**ANSWER: B**