

DUMPSBOSS.

Service Provider Routing and Switching, Specialist (JNCIS-SP)

Juniper JN0-363

Version Demo

Total Demo Questions: 10

Total Premium Questions: 65

Buy Premium PDF


<https://dumpsboss.co>

support@dumpsboss.co

support@dumpsboss.co
dumpsboss.co

QUESTION NO: 1

Exhibit

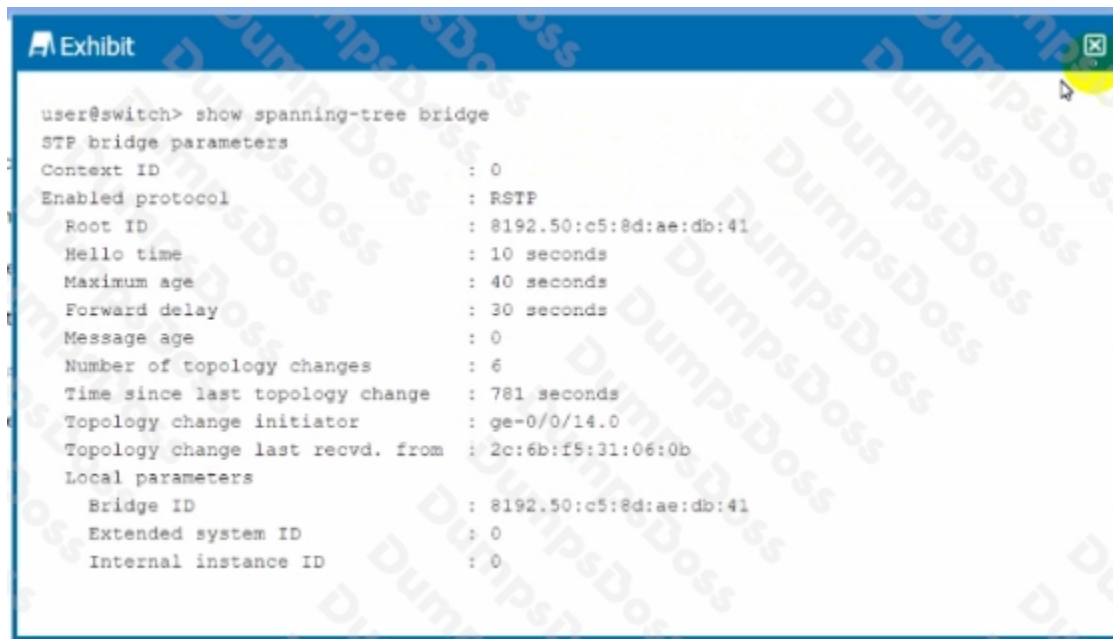

```
user@switch> show spanning-tree bridge
STP bridge parameters
Context ID           : 0
Enabled protocol     : RSTP
Root ID              : 8192.50:c5:8d:ae:db:41
Hello time           : 10 seconds
Maximum age          : 40 seconds
Forward delay        : 30 seconds
Message age          : 0
Number of topology changes : 6
Time since last topology change : 781 seconds
Topology change initiator : ge-0/0/14.0
Topology change last recvd. from : 2c:6b:f5:31:06:0b
Local parameters
  Bridge ID          : 8192.50:c5:8d:ae:db:41
  Extended system ID : 0
  Internal instance ID : 0
```

Which two statements are correct about the information shown in the exhibit? (Choose two.)

- A. The root bridge is reachable using the ge-0/0/14 interface.
- B. This switch is the root bridge for this spanning tree topology.
- C. This switch has a bridge priority of 8k.
- D. The root bridge's priority is 4k.

ANSWER: B D**QUESTION NO: 2**


You are asked to create connections between routing instances on the same Junos device and route between the connected instances. What are two ways to accomplish this task? (Choose two.)

- A. Use physical interfaces.
- B. Use an IRB interface.
- C. Use logical tunnel interfaces.
- D. Use loopback interfaces.

ANSWER: A B

QUESTION NO: 3

Exhibit

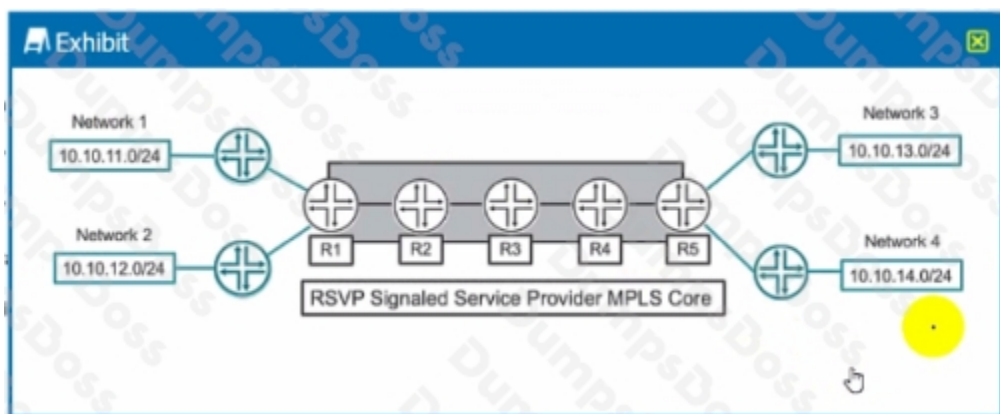

Which two statements are correct about the service provider MPLS network shown in the exhibit? (Choose two.)

- A. R3 is considered a P router.
- B. R3 is considered a PE router.
- C. R3 is considered a transit router.
- D. R3 is considered an ingress router.

ANSWER: A B

QUESTION NO: 4

Which new field is added to an IPv6 header as compared to IPv4?

- A. version
- B. checksum
- C. fragment offset
- D. flow label

ANSWER: D

QUESTION NO: 5


You want to see a detailed list of all established BGP sessions. In this scenario, what would be a valid command to accomplish this task?

- A. show bgp neighbor
- B. show bgp summary
- C. show rouse receive-protocol bgp
- D. show rouse protocol bgp

ANSWER: D

QUESTION NO: 6

Exhibit

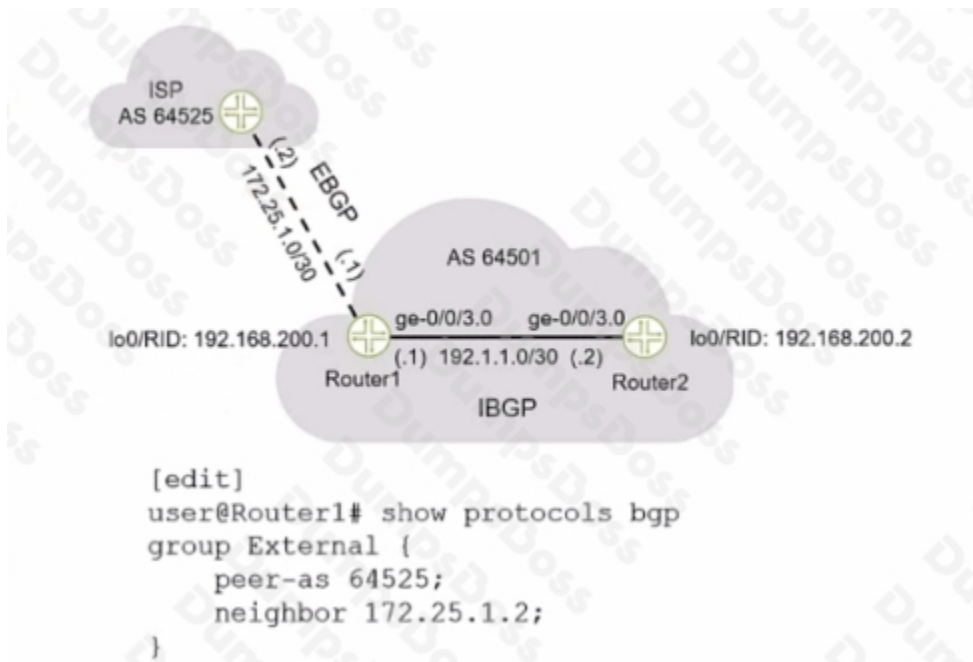

Referring to the exhibit, what must be included in the Router1 configuration when establishing an EBGP session with the ISP?

- A. A local address must be specified.
- B. A local AS must be specified.
- C. The BGP session type internal must be specified.
- D. The BGP session type external must be specified.

ANSWER: A

QUESTION NO: 7


What are two types of SIDs used in segment touting? (Choose two.)

- A. node
- B. adjacency
- C. link
- D. interface

ANSWER: A B

QUESTION NO: 8

Exhibit

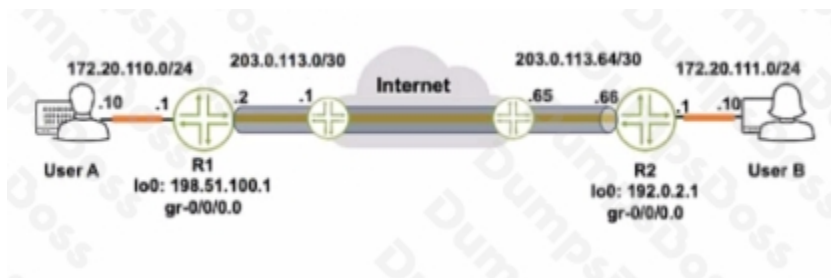

Referring to the exhibit, how do you verify the status of the tunnel from R1?

- A. Issue the ping 172.20.111.10 source 172.20.110.1 command.
- B. Issue the ping 172.20.111.10 source 198.51.100.1 command.
- C. Issue the ping 172.20.iii.io source 203.0.113.2 command.
- D. Issue the ping 172.20. III. 10 command.

ANSWER: C

QUESTION NO: 9

Exhibit

```
user@R2> show ospf interface extensive
Interface State Area DR ID BDR ID Nbrs
ge-0/0/3.0 DR 0.0.0.1 192.168.1.2 192.168.1.1 1 Type: LAN, Address: 172.26.1.2, Mask:
255.255.255.252, MTU: 1500, Cost: 1
DR addr: 172.26.1.2, BDR addr: 172.26.1.1, Priority: 128, Adj count: 1
Hello: 10, Dead: 40, ReXmit: 5, Not Stub
Auth type: None Topology default (ID 0) -> Cost: 0
ge-0/0/1.0 BDR 0.0.0.0 192.168.1.3 192.168.1.2 1
Type: LAN, Address: 172.26.2.1, Mask: 255.255.255.252, MTU: 1500, Cost: 1
DR addr: 172.26.2.2, BDR addr: 172.26.2.1, Priority: 128, Adj count: 1 Hello: 10,
Dead: 40, ReXmit: 5, Not Stub
Auth type: None
Topology default (ID 0) -> Cost: 0
```

Referring to the exhibit, which two statements are correct? (Choose two.)

- A. The OSPF Interfaces are configured as point-to-point.
- B. The ge-0/0/1.0 Interface is configured as passive.
- C. The R2 device is an ABR.
- D. Junos OS default OSPF hello timers and dead intervals are used on all interfaces.

ANSWER: B D

QUESTION NO: 10

Exhibit

S Exhibit

LSI1 A AS 65501


ISPB AS 65502

Advertised Prefixes: 172.20.0.0/24 172.20.20.0/24 172.20.21.0/24

\ N

Advertised Prefixes: 172.20.0.0/24

172.20.1.0/24

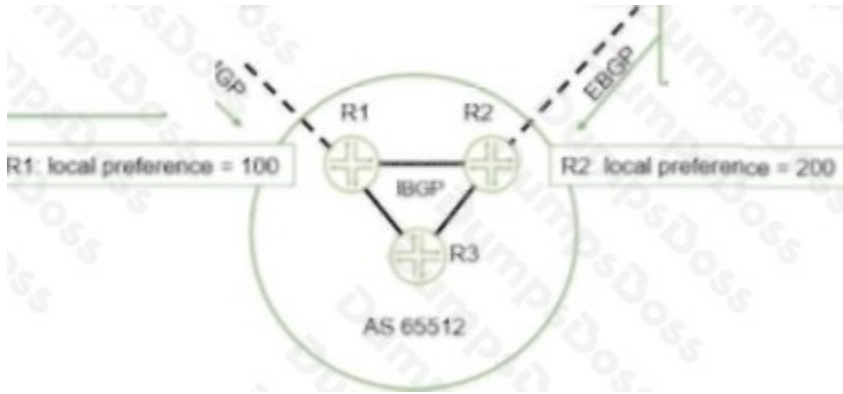

Referring to the exhibit, which two statements are correct? (Choose two.)

- A. Devices in AS 65512 will prefer ISP A for traffic destined to the 172.20.21.0/24 network.
- B. Devices In AS 65512 will prefer ISP A for traffic destined to the 172.20.0.0/24 network.
- C. Devices in AS 65512 will prefer ISP B for traffic destined to the 172.20.21.0/24 network.
- D. Devices In AS 65512 will prefer ISP B for traffic destined to the 172.20.0.0/24 network.

ANSWER: C