

DUMPSBOSS.

MuleSoft Certified Developer - Integration and API Associate (Mule 3)

Mulesoft MCD-ASSOC

Version Demo

Total Demo Questions: 6

Total Premium Questions: 60

Buy Premium PDF

<https://dumpsboss.co>

support@dumpsboss.co

support@dumpsboss.co
dumpsboss.co

QUESTION NO: 1

Refer to the exhibit. How is the watermark referenced inside the Set Payload transformer?

The screenshot shows the MuleSoft Studio interface. On the left, a message flow diagram is visible with a 'Poll' connector connected to a 'Set Payload' transformer. The 'Set Payload' transformer configuration is shown on the right. In the 'Watermark' section, the 'Enable watermark' radio button is selected. The 'Variable Name' is 'createdOn', the 'Default Expression' is '0', the 'Selector' is 'MAX', and the 'Selector Expression' is '#[payload.created_on]'. The 'Object Store' field is empty.

- A. #[payload.createdOn]
- B. #[message.inboundProperties.createdOn]
- C. #[flowVars.createdOn]
- D. #[message.outboundProperties.createdOn]

ANSWER: C

QUESTION NO: 2

What is the uniform interface used by RESTful web services?


- A. RPC
- B. JMS
- C. HTTP
- D. SOAP

ANSWER: C

QUESTION NO: 3

Refer to the exhibit. A web client makes a request to the postUsersFlow's HTTP Listener.

The Validation component in hrFlow then throws an exception. What response message is returned to the web client?

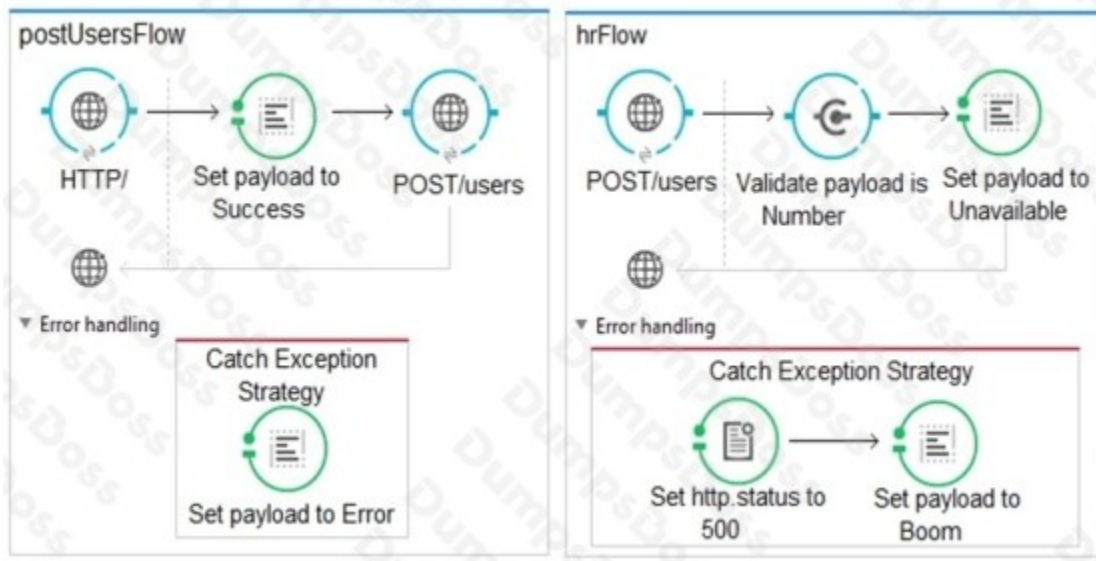

- A. Unavailable
- B. Error
- C. Success
- D. Boom

ANSWER: D

QUESTION NO: 4

What three elements are used in RAML specifications?

(Choose three.)

- A. Service
- B. Method
- C. Response
- D. PortType

E. Resource

ANSWER: B C E


Explanation:

Reference: <https://docs.mulesoft.com/api-manager/1.x/designing-your-api>

QUESTION NO: 5

Refer to the exhibits. The two Mule configuration files belong to the same Mule project. Each HTTP Listener is configured with the same host string and the port number, path, and operation values are shown in the display names.

What is the minimum number of global elements that must be defined to support all these HTTP Listeners?

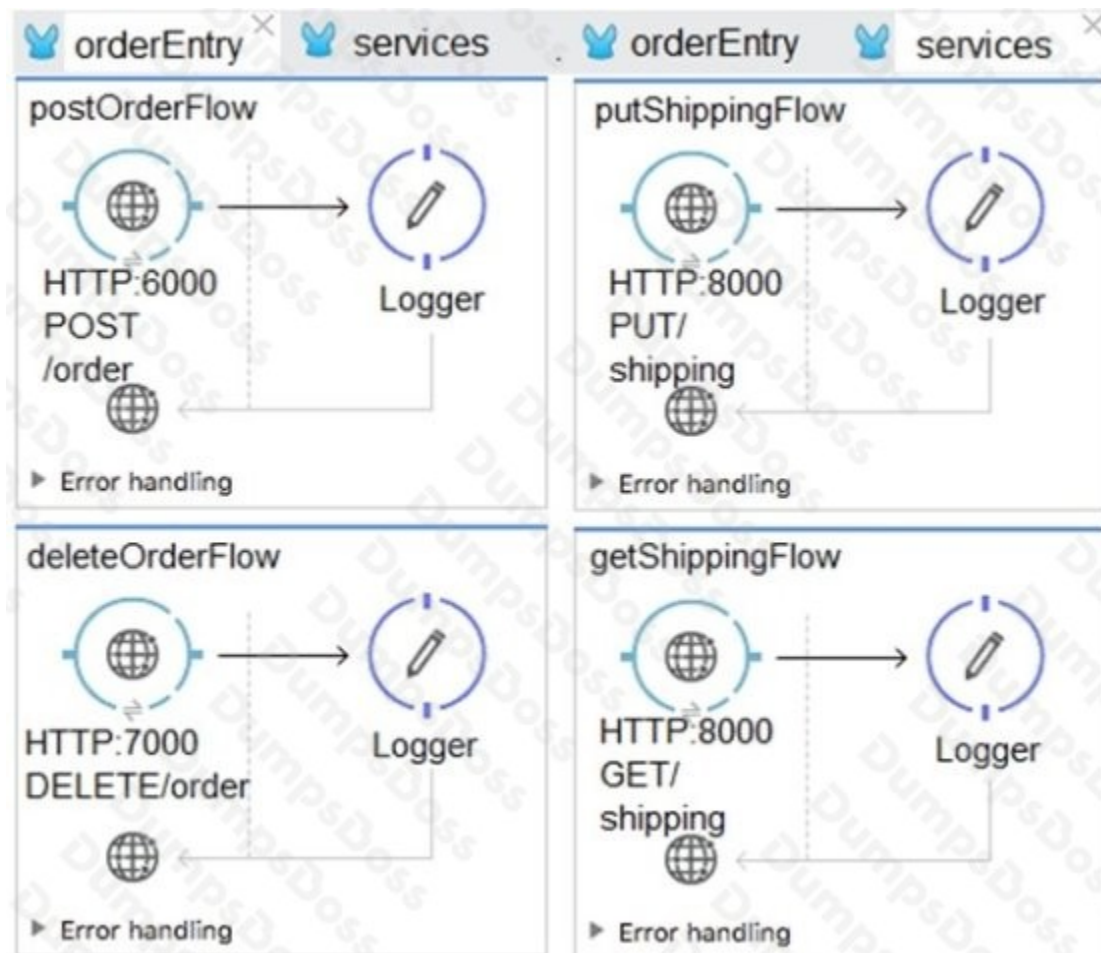


- A. 1
- B. 2
- C. 3

D. 4

ANSWER: D**QUESTION NO: 6**

Refer to the exhibit. The parentFlow contains a Flow Reference for childFlow.

What values are accessible in childFlow after a web client submits a request to `http://localhost:8081/order?color=red?`

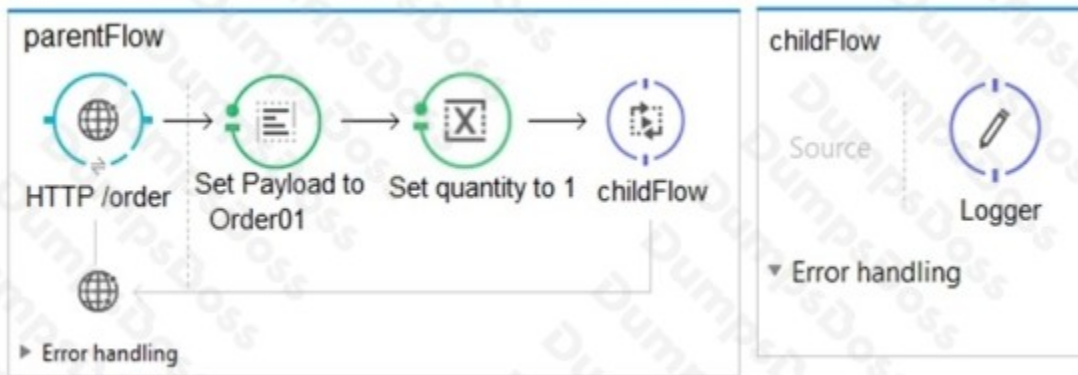

A. payload

B. payload quantity var C. payload color query param D. payload quantity var color query param

ANSWER: A