

# DUMPSBOSS.

## Oracle Cloud Infrastructure 2021 Cloud Operations Associate

Oracle 1z0-1067-21

Version Demo

Total Demo Questions: 10

Total Premium Questions: 55

Buy Premium PDF

<https://dumpsboss.co>

[support@dumpsboss.co](mailto:support@dumpsboss.co)

support@dumpsboss.co  
dumpsboss.co

## QUESTION NO: 1

Your application is using an Object Storage bucket named app-data in the namespace vision, to store both persistent and temporary data. Every week all the temporary data should be deleted to limit the storage consumption.

Currently you need to navigate to the Object Storage page using the web console, select the appropriate bucket to view all the objects and delete the temporary ones.

To simplify the task you have configured the application to save all the temporary data with /temp prefix. You have also decided to use the Command Line Interface (CLI) to perform this operation. What is the command you should use to speed up the data cleanup? (Choose the best answer.)

- A. `oci os object delete -ns vision -bn app-data --prefix /temp`
- B. `oci os object bulk-delete -ns vision -bn app-data --prefix /temp --force`
- C. `oci objectstorage bulk-delete -ns vision -bn app-data --prefix /temp --force`
- D. `oci os object delete app-data in vision where prefix = /temp`

**ANSWER: B**

## QUESTION NO: 2

Which two statements about the Oracle Cloud Infrastructure (OCI) Command Line Interface (CLI) are TRUE? (Choose two.)

- A. You can run CLI commands from inside OCI Regions only.
- B. You can filter CLI output using the JMESPath query option for JSON.
- C. The CLI provides an automatic way to connect with instances provisioned on OCI.
- D. The CLI allows you to use the Python language to interact with OCI APIs.
- E. The CLI provides the same core functionality as the Console, plus additional commands.

**ANSWER: B E**

## QUESTION NO: 3

One of the compute instances that you have deployed on Oracle Cloud Infrastructure (OCI) is malfunctioning. You have created a console connection to remotely troubleshoot it. Which two statements about console connections are TRUE? (Choose two.)

- A. It is not possible to use VNC console connections to connect to Bare Metal Instances.


- B. VNC console connection uses SSH port forwarding to create a secure connection from your local system to the VNC server attached to your instance's console.
- C. It is not possible to connect to the serial console to an instance running Microsoft Windows, however VNC console connection can be used.
- D. For security purpose, the console connection will not let you edit system configuration files.
- E. If you do not disconnect from the session, your serial console connection will automatically be terminated after 24 hours.

**ANSWER: B E**

## QUESTION NO: 4

Your company has restructured its HR departments. As part of this change, you also need to re-organize compartments within Oracle Cloud Infrastructure (OCI) to align them to the company's new organizational structure. The following change is required:

Compartment Team\_x needs to be moved under a new parent compartment, Project\_B

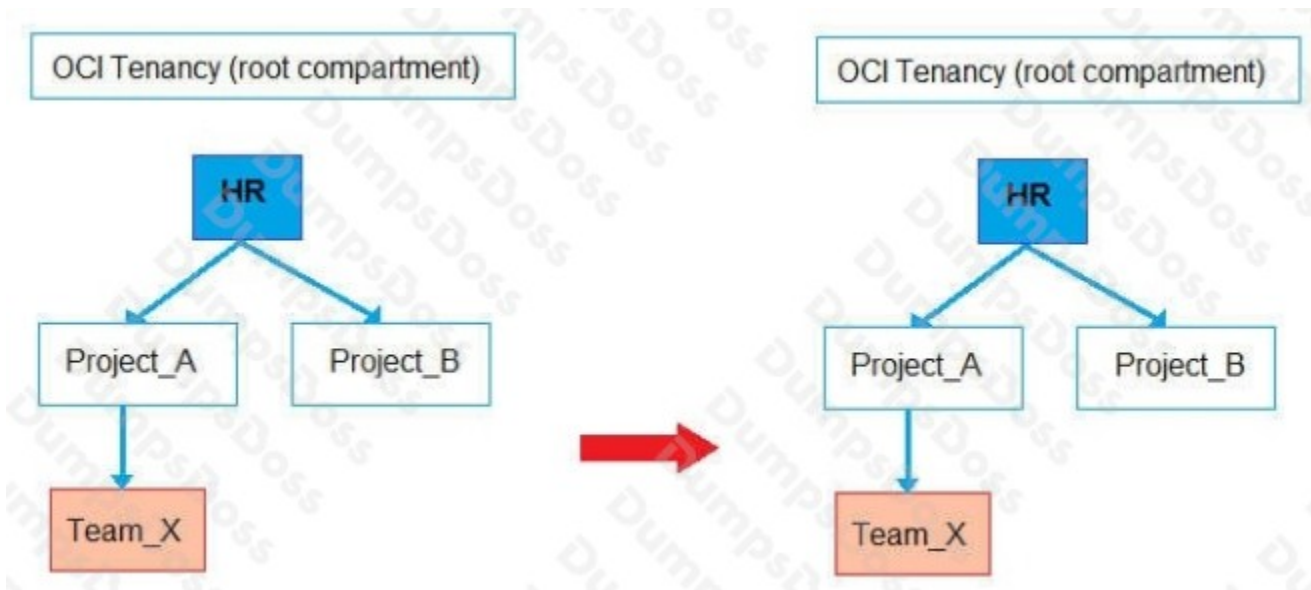

The tenancy has the following policies defined for compartments Project\_A and Project\_B:

Policy1: Allow group G1 to manage instance-family in compartment HR:Project\_A

Policy2: Allow group G2 to manage instance-family in compartment HR:Project\_B

Which two statements describe the impacts after the compartment Team\_x is moved? (Choose two.)

- A. Group G2 can now manage instance-families in compartment Project\_B and compartment Team\_X
- B. Group G1 can now manage instance-families in compartment Project\_A, compartment Project\_B and compartment Team\_X
- C. Group G1 can now manage instance-families in compartment Project\_A but not in compartment Team\_x

- D. Group G2 can now manage instance-families in compartment Project\_A but not in compartment Team\_x
- E. Group G2 can now manage instance-families in compartment Project\_B, compartment Project\_A and compartment Team\_X

**ANSWER: A C**

## QUESTION NO: 5

You are using Oracle Cloud Infrastructure (OCI) console to set up an alarm on a budget to track your OCI spending.

Which two are valid targets for creating a budget in OCI? (Choose two.)

- A. Select group as the type of target for your budget.
- B. Select Tenancy as the type of target for your budget.
- C. Select user as the type of target for your budget.
- D. Select Cost-Tracking Tags as the type of target for your budget.
- E. Select Compartment as the type of target for your budget.

**ANSWER: D E**

## QUESTION NO: 6

What is a key benefit of using Oracle Cloud Infrastructure's Resource Manager for your Terraform provisioning and management activities? (Choose the best answer.)

- A. You can use Resource Manager to apply patches to all existing Oracle Linux interfaces in a specified compartment.
- B. Resource Manager has administrative privileges by design. Even if your IAM user does not have access, you can leverage Resource Manager to provision new resources to any compartment in the Tenancy.
- C. You can use Resource Manager to identify and maintain an inventory of all Compute and Database instances across your tenancy.
- D. Resource Manager manages to Terraform state file for your infrastructure and locks the file so that only one job at a time can run on a given stack.

**ANSWER: D**

### Explanation:

Reference: <https://docs.oracle.com/en-us/iaas/Content/ResourceManager/Concepts/samplecomputeinstance.htm>

## QUESTION NO: 7

You have received an email from your manager to provision new resources on Oracle Cloud Infrastructure (OCI). When researching OCI, you determined that you should use OCI Resource Manager. Since this is a task that will be done multiple times for development, test, and production. You will need to create a command that can be re-used.

Which CLI command can be used in this situation? (Choose the best answer.)

- A.** `oci resource-manager stack create --tenancy-id \`  
`--config-source prod.zip --variables file://variables.json \`  
`--display-name Production stack build \`  
`--description Creating new Production environment`
- B.** `oci resource-manager stack update --compartment-id \`  
`--config-source prod.zip --variables file://variables.json \`  
`--display-name "Production stack build" \`  
`--description Creating new Production environment`
- C.** `oci resource-manager stack create --compartment-id \`  
`--config-source prod.zip --variables file://variables.json \`  
`--display-name Production stack build \`  
`--description Creating new Production environment`
- D.** `oci resource-manager stack update --tenancy-id \`  
`--config-source prod.zip --variables file://variables.json \`  
`--display-name "Production stack build" \`  
`--description Creating new Production environment`

**ANSWER: C**

## QUESTION NO: 8

Which two statements are TRUE about Object Storage data security and encryption in Oracle Cloud Infrastructure (OCI)? (Choose two.)

- A.** Client-side encryption is managed by the customer.
- B.** Data needs to be decrypted on the client side before retrieving it.
- C.** OCI Vault Management is used by default to provide data security.
- D.** All traffic to and from Object Storage service is encrypted using TLS.
- E.** A VPN connection to OCI is required to ensure secure data transfer to an object storage bucket.

**ANSWER: A D**

## QUESTION NO: 9

Which statement about Oracle Cloud Infrastructure paravirtualized block volume attachments is TRUE? (Choose the best answer.)

- A. Paravirtualized volumes may reduce the maximum IOPS performance for larger block volumes.
- B. Paravirtualized is required to manage iSCSI configuration for virtual machine instances.
- C. Paravirtualized volumes become immediately available on bare metal compute instances.
- D. Paravirtualization utilizes the internal storage stack of compute instance OS and network hardware virtualization to access block volumes.

**ANSWER: A**

**Explanation:**

Reference: <https://blogs.oracle.com/cloud-infrastructure/paravirtualized-block-volume-attachments-for-vm>s

**QUESTION NO: 10**

You have created the following JSON file to specify a lifecycle policy for one of your object storage buckets:

```
[
  {
    "name": "Archive LOGS",
    "action": "ARCHIVE",
    "objectNameFilter": {
      "inclusionPrefixes": [
        "LOGS"
      ]
    },
    "timeAmount": 30,
    "timeUnit": "DAYS",
    "isEnabled": true
  },
  {
    "name": "DELETE_LOGS",
    "action": "DELETE",
    "objectNameFilter": {
      "inclusionPrefixes": [
        "LOGS"
      ]
    },
    "timeAmount": 120,
    "timeUnit": "DAYS",
    "isEnabled": true
  }
]
```

How will this policy affect the objects that are stored in the bucket? (Choose the best answer.)

- A. Objects with the prefix "LOGS" will be retained for 120 days and then deleted permanently.
- B. Objects containing the name prefix LOGS will be automatically migrated from standard Storage to Archive storage 30 days after the creation date. The object will be deleted 120 days after creation.
- C. The objects with prefix "LOGS" will be deleted 30 days after creation date.
- D. Objects containing the name prefix LOGS will be automatically migrated from standard Storage to Archive storage 30 days after the creation date. The object will be migrated back to standard Storage 120 days after creation.

**ANSWER: B**